



BT168



All position application
 Applicable to various road surfaces
 With good performance in anti-cracking and tear resistance
 The pattern is good in low heating up and high speed performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							SINGLE/DUAL	PRC	WET GRIP
7.50R16LT	16	TT	215	805	124/120	1600/1405	800/800	K	6.00G	12	D	C	75
8.25R16LT	16	TT	235	855	128/124	1800/1600	770/770	K	6.50H	12	D	C	75
11R22.5	16	TL	279	1050	148/145	3150/2900	850/850	M	8.25	16			
13R22.5	18	TL	320	1124	156/150	4000/3350	875/875	L	9.75	15	D	C	75
315/80R22.5	20	TL	312	1076	156/150	4000/3350	850/850	M	9.00	15	D	C	75




BT188



Applicable for drive axle
 Applicable to mix and bad road surface, such as construction road
 With good grip performance
 good wear resistance and long mileage

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							SINGLE/DUAL	PRC	WET GRIP
13R22.5	18	TL	320	1124	156/150	4000/3350	875/875	K	9.75	22	E	C	75

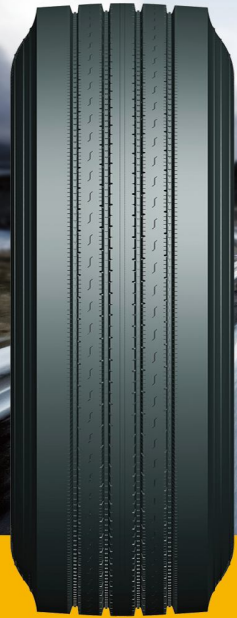

BT212



Mainly for steer wheel
Fuel saving for low rolling resistance
Long life and smooth wear

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX.LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
11R22.5	16	TL	279	1054	146/143	3000/2725	830/830	M	8.25	14			



BT215N

M+S



Mainly for rated load and long haul application of trailers
For high speed riding on good roads
Zigzag shape main slots design enhances handling performance and service life
With high irregular wear resistance technology

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX.LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
385/65R22.5	20	TL	389	1072	160	4500	900	K	11.75	15	D	B	72
385/65R22.5	22	TL			164			K					



BT215



Mainly for rated load and long haul application of trailers
 For high speed riding on good roads
 Straight main slots design enhances handling performance and service life
 With high irregular wear resistance technology

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
M+S 275/70R22.5	18	TL	276	958	148/145	3150/2900	900/900	J	8.25	19.2	C	B	70
425/65R22.5	20	TL	430	1124	165	5150	825	K	13.00	15	D	C	73
385/55R22.5	20	TL	386	996	160	4500	900	K	12.25	15	D	C	73
435/50R19.5	20	TL	438	931	160	4500	900	J	14.00	14			



BT216



Mainly for long haul application of light truck and all positions wheels on good road
 Four longitudinal grooves design exactly accords with the quick movement feature of light truck
 Low heating up compound ensures good wear resistance and fuel saving
 Continuous pattern in the shoulder avoids tire irregular wear

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
7.50R16LT	16	TT	215	805	124/120	1600/1405	800/800	K	6.00G	12			



BT218




Mainly for long haul of steer and trailer wheels
 Applicable to ride on good road and highway
 With good skid resistance and performance of water drainage
 This pattern has low heating up and low rolling resistance performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
11R22.5	16	TL	279	1050	148/145	3150/2900	850/850	M	8.25	14.8	D	B	75



BT288



Low heat build-up
 All position application
 Applicable to normal and good road
 With good anti-skid and irregular wear resistance
 The pattern is in low heating up and rolling resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
7.50R16LT	16	TT	215	805	124/120	1600/1405	800/800	K	6.00G	11	D	C	75
8.25R16LT	16	TT	235	855	128/124	1800/1600	770/770	K	6.50H	12	D	C	75



BT219



This pattern has low heating up and low rolling resistance performance
 Applicable for high speed ride on highway and good roads
 With wide tread design to extend tire service life
 This pattern has performance in low heating up and rolling resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX.LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
11R22.5	16	TL	279	1054	146/143	3000/2725	830/830	M	8.25	14.8	D	B	73
12R22.5	18	TL	300	1085	152/149	3550/3250	930/930	L	9.00	14.8	D	B	73
275/80R22.5	16	TL	276	1012	149/146	3250/3000	850/850	L	8.25	15			
295/80R22.5	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	14.8	D	B	73
315/80R22.5	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	15.5	D	B	73
295/60R22.5	18	TL	292	926	150/147	3350/3075	900/900	K	9.00	14.8	D	C	73
315/60R22.5	16	TL	313	950	152/148	3550/3150	900/900	L	9.75	14.8	D	C	73
295/80R22.5	18	TL			154/149			M					



BT369



For long haul application of truck and all positions wheels on good roads
 With wide tread design to extend tire service life
 With excellent water drainage and heat dispersion performance
 This pattern has performance in low heating up and rolling resistance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
11R22.5	16	TL	279	1054	146/143	3000/2725	830/830	L	8.25	17.5	D	C	72
12R22.5	16	TL	300	1085	150/147	3350/3057	830/830	K	9.00	18	D	C	72
295/80R22.5	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	18	D	C	72
315/80R22.5	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	18	D	C	72
295/80R22.5	18	TL			154/149			M					



BT388

M+S



For regional application of drive axle
 Applicable to various road surface on freeway
 With good grip and traction performance
 Excellent wear resistance and long mileage

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
11R22.5	16	TL	279	1050	148/145	3150/2900	850/850	M	8.25	20	D	B	75
315/70R22.5	18	TL	312	1014	154/150	3450/3150	830/830	M	9.00	19	E	C	75
295/80R22.5	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	20.5	D	B	75
315/80R22.5	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	21	E	B	75
295/80R22.5	18	TL			154/149			M					



BT398+



Mainly used for drive wheel
For long haul application on paved road
Deep tread depth and wide tread crown offers long mileage
Unique tread block ensures good traction and brake performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							SINGLE/DUAL	SINGLE/DUAL (kg)	SINGLE/DUAL (kpa)
315/80R22.5	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	24			



BT518

M+S



All position application
Mainly for good road surface
With good grip and excellent traction performance
The pattern has good performance in low heating up and carrying capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							SINGLE/DUAL	SINGLE/DUAL (kg)	SINGLE/DUAL (kpa)
385/65R22.5	20	TL	389	1072	160	4500	900	K	11.75	17	D	C	76



BT588

M+S




For regional application of drive axle
Applicable for mud and snow road
Excellent grip and traction performance
This pattern has low heating up and good high speed performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
11R22.5	16	TL	279	1050	148/145	3150/2900	850/850	M	8.25	20	D	B	76
315/80R22.5	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	21	E	B	76
295/80R22.5	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	21	D	B	76
295/80R22.5	18	TL			154/149			M					



BT668



Good loading capacity, low rolling resistance and low noise
With excellent water drainage and skid resistance
Mainly for regional transportation of trailer axle, also applicable for steer axle
Applicable for medium and high speed transportation on normal and good roads

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
385/65R22.5	20	TL	389	1072	160	4500	900	K	11.75	15	C	B	73
385/65R22.5	22	TL			164			K					



BT669



Mainly for trailer wheel
 Fuel saving for low rolling resistance
 Long mileage and low cost per mile

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
11R22.5	16	TL	279	1054	146/143	3000/2725	830/830	M	8.25	10			



BT688



Mainly for steer axle, especially applicable for high
 way and urban roads
 Applicable for normal and good road surface
 With good stable ability and wear resistance
 Comfortable and fuel saving

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL (kg)	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
275/70R22.5	16	TL	276	958	148/145	2800/2575	830/830	M	8.25	14.8	D	B	73
315/70R22.5	18	TL	312	1014	154/150	3450/3150	830/830	M	9.00	15	E	C	73



BT926



Mainly for long haul application of steer and trailer wheels
 Applicable for high speed riding on highway and good roads
 With excellent water drainage and heat dispersion performance
 This pattern has performance in low heating up and low noise

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX.LOAD (kg) SINGLE/DUAL	PRESSURE SINGLE/DUAL (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							PRC	WET GRIP	NOISE dB(A)
215/75R17.5	14	TL	211	767	126/124	1650/1500	760/760	M	6.00	13	C	C	75
215/75R17.5	16	TL	211	767	135/133	1750/1600	830/830	J	6.00	13	C	C	75
225/70R19.5	12	TL	226	811	125/123	1650/1550	660/660	M	6.75	13.5	C	C	75
225/70R19.5	14	TL	226	811	128/126	1800/1700	760/760	M	6.75	13.5	C	C	75
235/75R17.5	16	TL	233	797	132/130	2000/1850	830/830	M	6.75	13.5	C	C	75
235/75R17.5	18	TL	233	797	143/141	2725/2575	875/875	J	6.75	13.5	C	C	75
245/70R19.5	14	TL	248	839	133/131	2060/1950	760/760	M	7.50	13.5	C	C	75
245/70R19.5	16	TL	248	839	136/134	2180/2060	830/830	M	7.50	13.5	C	C	75
245/70R19.5	18	TL	248	839	141/140	2575/2500	850/850	J	7.50	13.5	C	C	75



BT929




All positions wheels on good road
 Excellent high speed performance and good grip
 both on dry and wet road
 Good wear resistance and fuel saving
 Continuous pattern in the shoulder avoids tire ir-
 regular wear

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL
265/70R19.5	14	TL	262	876	143/141	2500/2360	850/850	J	7.50	13.5	E	D	71



BT968



Mainly for long haul application of steer wheel,
 also applicable for trailer wheels
 Applicable to ride on high way and good road with
 high speed
 With good performance of water drainage and
 skid resistance
 This pattern has low heating up and low rolling re-
 sistance performance

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL
315/80R22.5	20	TL	312	1076	156/150	4000/3350	850/850	L	9.00	15	C	A	75
295/80R22.5	18	TL	298	1044	152/149	3550/3250	900/900	M	9.00	15	D	B	75
295/80R22.5	18	TL			154/149			M					



BT957



Mainly for drive wheels
Applicable for medium and high speed riding on normal and good roads
With excellent grip and traction performance
This pattern has good performance in low heating up and carrying capacity

SIZE	PLY	TYPE	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX.LOAD (kg)	PRESSURE	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)	LABEL RATINGS		
			SECTION WIDTH	OVERALL DIAMETER							SINGLE/DUAL	SINGLE/DUAL (kg)	SINGLE/DUAL (kpa)
215/75R17.5	14	TL	211	767	126/124	1650/1500	760/760	M	6.00	14.5	C	D	75
215/75R17.5	16	TL	211	767	135/133	1750/1600	830/830	J	6.00	14.5	C	D	75
225/70R19.5	12	TL	226	811	125/123	1650/1550	660/660	M	6.75	15	C	D	75
225/70R19.5	14	TL	226	811	128/126	1800/1700	760/760	L	6.75	15	C	D	75
235/75R17.5	16	TL	233	797	132/130	2000/1850	830/830	M	6.75	15.4	C	D	75
235/75R17.5	18	TL	233	797	143/141	2725/2575	875/875	J	6.75	15.4	C	D	75
245/70R19.5	14	TL	248	839	133/131	2060/1950	760/760	M	7.50	16	C	C	75
245/70R19.5	16	TL	248	839	136/134	2180/2060	830/830	M	7.50	16	C	C	75
245/70R19.5	18	TL	248	839	141/140	2575/2500	850/850	J	7.50	16	C	C	75
265/70R19.5	18	TL	262	876	143/141	2725/2575	850/850	J	7.50	13.5			